User Manual

Product Instruction

Thank you for choosing our NTG Rifle Borescope. Please read the user manual before operating and maintain it properly for further reference.

⚠ Do not use this camera for medical purposes or human examination.

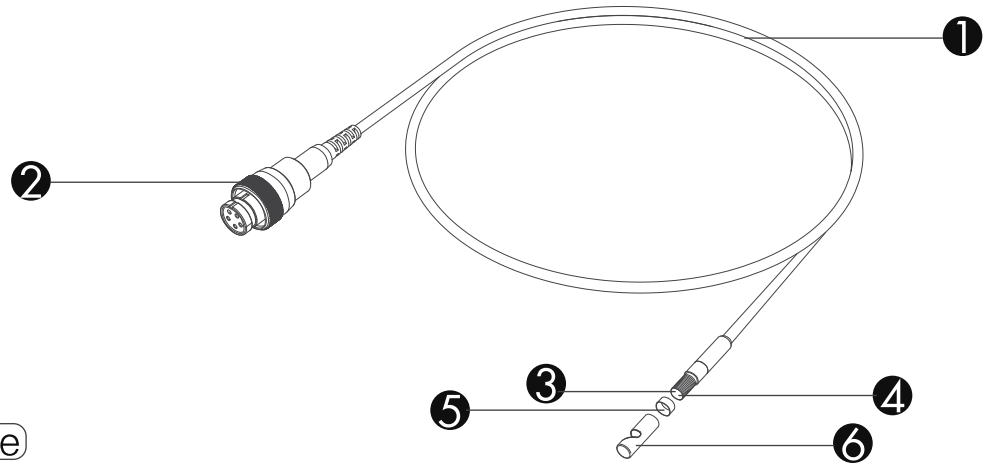

Probe

❶ Flexible Probe
❷ Connector
❸ Micro Lens Camera
❹ Built–in LED Lights
❺ Mirror locking ring
❻ Side View Mirror
❼ LED Brightness Control Wheel
❽ Connector
❾ 2–in–1 Micro USB / USB Plug

Cable

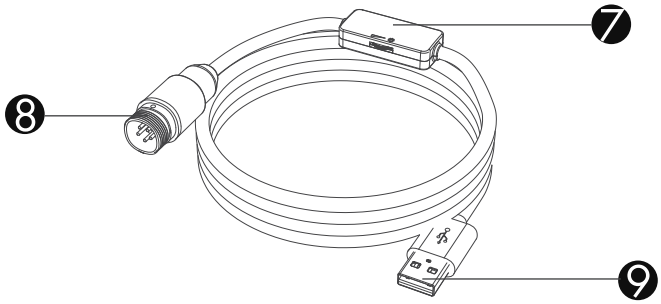

How to Use:

- Connect the probe to the cable

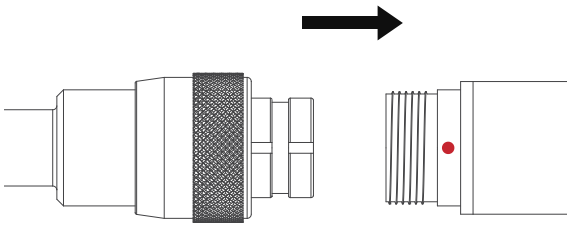

Align the groove with the red dot and insert

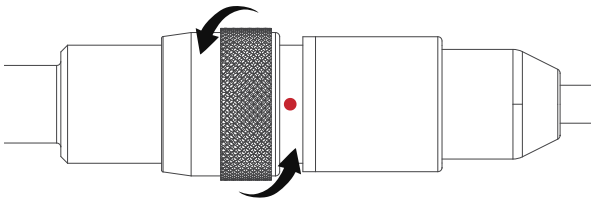

Rotate to tighten

- The rifle borescope adopts side–view mirror design. For different caliber barrels, please adjust the position of the side–view mirror accessories for a clearer image.

a. For rifle barrel with .223 caliber



b. For rifle barrel with bigger caliber



Tips: Please use the wiping cloth to clean the lens and the side view mirror to get clear image.

- 2–in–1 Micro USB/ USB Plug



USB port can directly connect to the computer



Micro USB port can connect to Android phones

- 6 Adjustable LED lights

(Turn to adjust brightness)

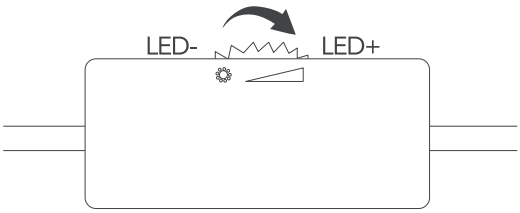

For Windows 10 Users

How to Use:

- Plug the borescope cable into your computer/ laptop’s USB port. You may or may not hear a chiming sound indicating that the laptop has recognized and connected to your borescope.

- Click on the【 】icon at lower left corner of the screen and search for【 Camera 】then run it.

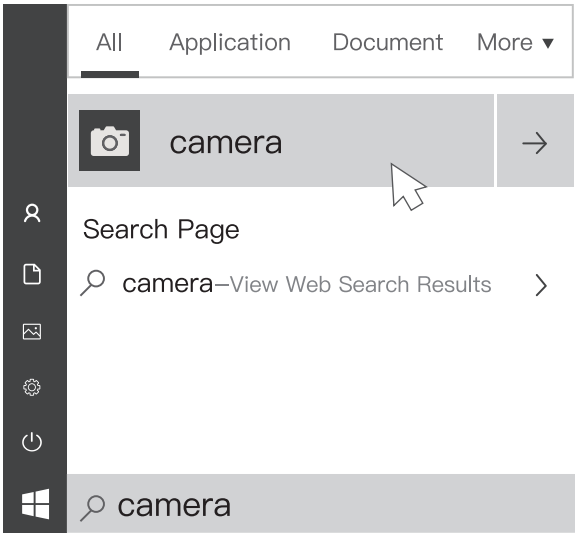

- In the new window, click on the word “ Camera” in the alphabetized vertical column now found at the left side of your computer screen.

- In this next new window, click on the camera icon【 】found at either the upper left or upper right corner of the screen. Clicking on this icon will switch your laptop screen to the borescope camera’s view. Using different icons found vertically along the right side of your screen, you can now take photos and record your rifle barrel’s condition for future reference.

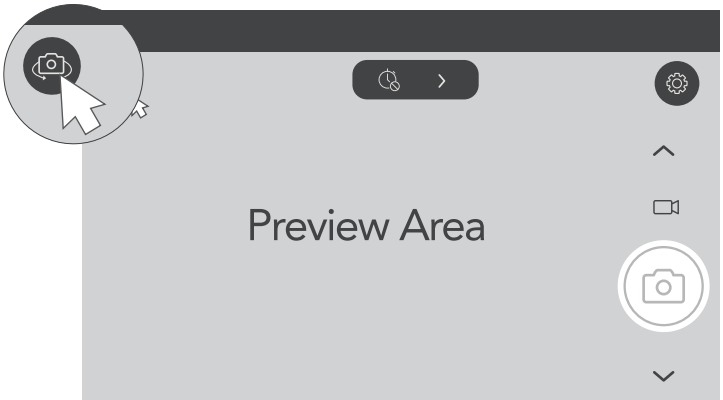

For Windows XP, Vista, Win7 Users

How to Use:

- Go to the link: “http://gto.so/nte.zip” and download the software named “Endoscope Camera” .

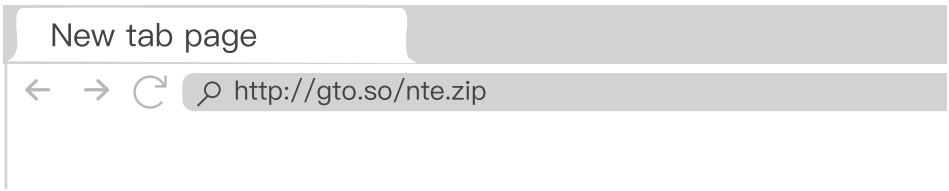

- Connect the borescope to the computer.

- Open the software, and select "Teslong Camera" or "USB 2.0 PC Camera" in the settings menu.

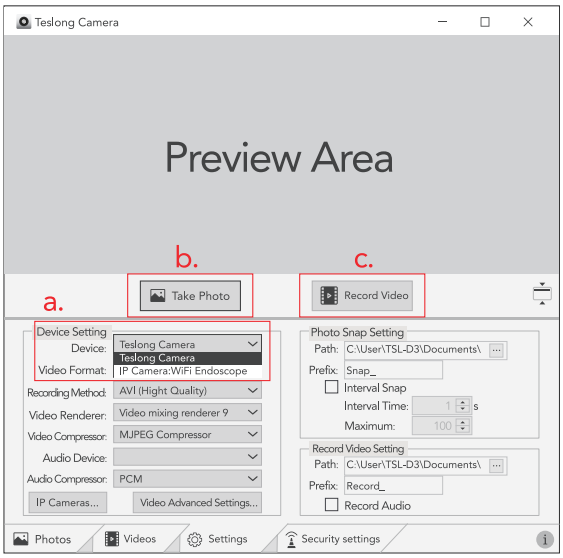

⚠ When you see a pop–up to “trust this software ?” when downloading, you can select ” trust “with confidence.Our software is 100% safe and clean with no adware, spyware, or viruses.

You can also use the software called "Amcap" which has good compatibility and stability.

Need help? please email us support@teslong.com

For Mac Users

How to Use:

- Put the device insert the USB port.
- Open “Photo Booth” on your Mac.
- Click “ View ” in upper left corner, select “Teslong Camera” or “USB 2.0 PC Camera” to activate the borescope.

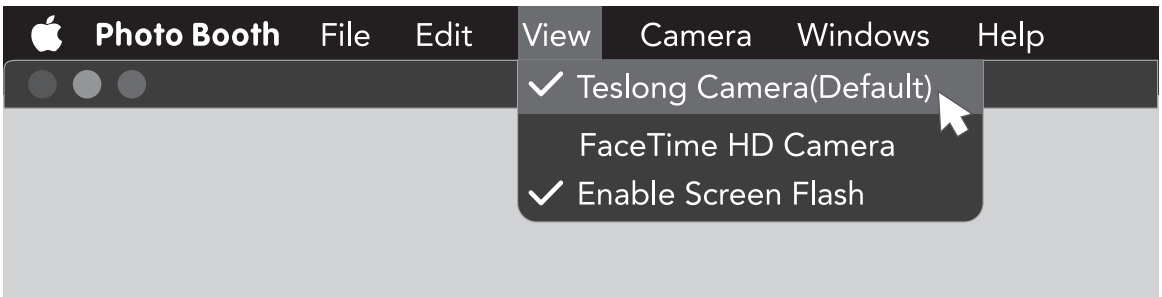

For Android Users

Please make sure the OTG function on your Android device is enabled before using!

Software: ***Endoscope Camera***

Please download the app【 Endoscope Camera 】or 【 Endoscope HD Camera 】 from the Google Play Store .

Endoscope HD Camera

Link:
"http://gto.so/echd.apk"

Endoscope Camera

Link:
"http://gto.so/ec.apk"

How to Use:

- Connect the borescope to your android phone. And open the app, select the device type: USB Endoscope. Then you can see the video stream in the "Preview Area".

⚠ This software can take photos and save photos. In order to perform these functions, makesure you grant access to your camera when installing the app.

You also can download the software 【USB camera】from Google Play Store, if “Endoscope Camera” app is not compatible with your phone.

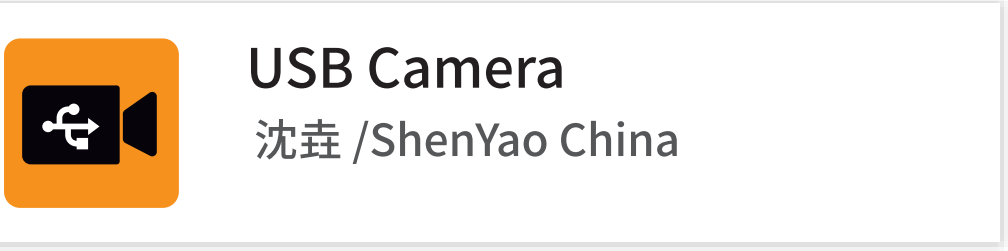

Specifications	
Model	NTG100
Sensor	1.0 Megapixel
Resolution	640x480 Pixels, 1280x720 Pixels
Depth of Field	0.4 – 0.6 inch
Light	6 Brightness Adjustable LEDs
Probe Diameter	0.2inch
Cable Length	36inch
Operation System	Android 4.4 or above; Windows XP, 7, 8, 10; Mac OS X; Chromebook

© TESLONG Rifle Borescope V202005-1.5

MADE IN CHINA